


High precision fluxgate AC/DC current transducer for galvanically isolated measurement up to 150 A

## Features

- 100 A rms nominal current
- 1000 :1 primary/secondary current ratio
- Current output
- Ø20.7 mm aperture
- 51 ppm total accuracy
- 1 ppm linearity
- 50 ppm offset
- 2 MHz bandwidth
- Status signal and LED

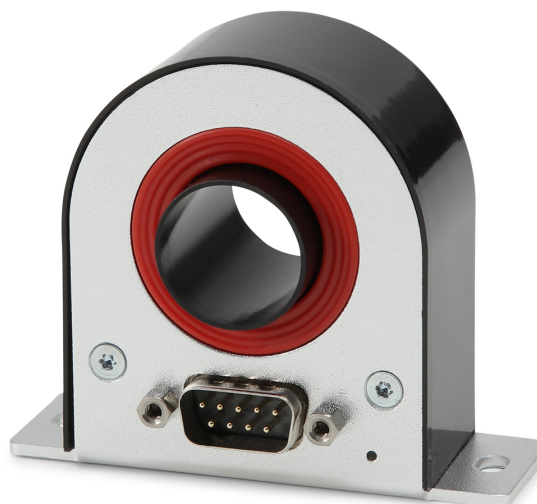

## Description

High precision DC current transducer (DCCT) measuring up to 150 A currents and continuously measuring 100 A currents with a linearity error less than 1 ppm. With a compact size and lightweight design, the DT100ID allows precision current sensing in tight spaces.

Based on the ultra stable Danisense closed loop flux gate technology, the DT100ID has very low offset and ultra low drift. The 2 MHz bandwidth allows high frequency and high precision measurements combined in a convenient package.

It provides high resolution for precise monitoring, reliable and consistent performance, and a compact and rugged design for easy installation and durability.

## Applications

- Space constrained applications
- Power measurement and power analysis
- Particles accelerators
- MRI devices and medical scanners
- Battery testing and evaluation systems
- Current calibration purposes
- Precision current sensing

## Electrical specifications at 23 °C, $V_S = \pm 15$ V supply voltage

| Parameter                                       | Symbol           | Unit      | Min                            | Typ.     | Max         | Comment                                                                                                         |
|-------------------------------------------------|------------------|-----------|--------------------------------|----------|-------------|-----------------------------------------------------------------------------------------------------------------|
| Nominal primary AC current                      | $I_{PN\ AC}$     | Arms      |                                |          | 100         | Refer to Fig. 3 for derating                                                                                    |
| Nominal primary DC current                      | $I_{PN\ DC}$     | A         | -100                           |          | 100         | Refer to Fig. 3 for derating                                                                                    |
| Measuring range                                 | $I_{PM}$         | A         | -150                           |          | 150         | Refer to Fig. 3 for derating                                                                                    |
| Overload capacity                               | $I_{OL}$         | A         | -500                           |          | 500         | Non-measured 100ms                                                                                              |
| Nominal secondary current                       | $I_{SN}$         | mA        | -100                           |          | 100         | At nominal primary DC current                                                                                   |
| Primary / secondary ratio                       | k                | A/A       | 1000                           |          | 1000        | $I_{primary}/I_{secondary}$                                                                                     |
| Measuring resistance                            | $R_M$            | $\Omega$  | 0                              | 50       |             | Refer to Fig. 2 for details                                                                                     |
| Linearity error                                 | $\epsilon_L$     | ppm       | -1                             | 0.4      | 1           | ppm refers to reading                                                                                           |
| Offset current (including earth field)          |                  | ppm       | -50                            |          | 50          | ppm refers to $I_{PN\ DC}$                                                                                      |
| Offset temperature coefficient                  |                  | ppm/K     | -0.3                           | 0.15     | 0.3         | ppm refers to $I_{PN\ DC}$                                                                                      |
| Offset stability over time                      |                  | ppm/month | -0.1                           |          | 0.1         | ppm refers to $I_{PN\ DC}$                                                                                      |
| Bandwidth                                       | $f(\pm 3dB)$     | MHz       |                                | 2        |             | Small signal. See Fig. 4                                                                                        |
| Response time to a step current $I_{PN}$        | $t_r$            | $\mu s$   |                                | 1        |             | To 90% of step current                                                                                          |
| Total accuracy without offset                   | $\epsilon_{tot}$ |           | % of reading + % of full scale |          |             | Full scale refers to $I_{PN\ DC}$ .<br>For details, see <b>Reading and full scale</b> .<br>See Fig. 4 for more. |
| <10 Hz                                          |                  |           | 0.0001 + 0.00001               |          |             |                                                                                                                 |
| <100 Hz                                         |                  |           | 0.0002 + 0.0001                |          |             |                                                                                                                 |
| <1 kHz                                          |                  |           | 0.01 + 0.0002                  |          |             |                                                                                                                 |
| <10 kHz                                         |                  |           | 0.015 + 0.0002                 |          |             |                                                                                                                 |
| <100 kHz                                        |                  |           | 3 + 0.002                      |          |             |                                                                                                                 |
| <1MHz                                           |                  |           | 15 + 0.01                      |          |             |                                                                                                                 |
| <2MHz                                           |                  |           | 30 + 0.01                      |          |             |                                                                                                                 |
| Phase shift                                     |                  |           |                                |          |             |                                                                                                                 |
| <10 Hz                                          |                  |           |                                | 0.01°    |             |                                                                                                                 |
| <100 Hz                                         |                  |           |                                | 0.01°    |             |                                                                                                                 |
| <1 kHz                                          |                  |           |                                | 0.03°    |             |                                                                                                                 |
| <10 kHz                                         |                  |           |                                | 0.2°     |             |                                                                                                                 |
| <100 kHz                                        |                  |           |                                | 3°       |             |                                                                                                                 |
| <1MHz                                           |                  |           |                                | 20°      |             |                                                                                                                 |
| <2MHz                                           |                  |           |                                | 30°      |             |                                                                                                                 |
| RMS noise                                       |                  | ppm rms   |                                |          |             | ppm refers to $I_{PN\ DC}$                                                                                      |
| <10 Hz                                          |                  |           |                                | 0.03     | 0.07        |                                                                                                                 |
| <100 Hz                                         |                  |           |                                | 0.5      | 1.1         |                                                                                                                 |
| <1 kHz                                          |                  |           |                                | 0.6      | 1.5         |                                                                                                                 |
| <10 kHz                                         |                  |           |                                | 0.9      | 2           |                                                                                                                 |
| <100 kHz                                        |                  |           |                                | 6.5      | 12          |                                                                                                                 |
| Peak-to-peak noise                              |                  | ppm p-p   |                                |          |             | ppm refers to $I_{PN\ DC}$                                                                                      |
| <10 Hz                                          |                  |           |                                | 0.4      | 0.5         |                                                                                                                 |
| <100 Hz                                         |                  |           |                                | 1.6      | 2           |                                                                                                                 |
| <1 kHz                                          |                  |           |                                | 3.2      | 4           |                                                                                                                 |
| <10 kHz                                         |                  |           |                                | 5.1      | 8           |                                                                                                                 |
| <100 kHz                                        |                  |           |                                | 50       | 80          |                                                                                                                 |
| Fluxgate excitation frequency                   | $f_{exc}$        | kHz       |                                | 15.6     |             |                                                                                                                 |
| Power supply voltages                           |                  | $V_{dc}$  | $\pm 14.25$                    |          | $\pm 15.75$ | Primary current = 0 A<br><br>At $I_{PN\ DC}$<br>At $I_{PM}$                                                     |
| Idle current consumption                        |                  | mA        |                                | $\pm 40$ |             |                                                                                                                 |
| Current consumption at nominal current          |                  | mA        | -140                           |          | 140         |                                                                                                                 |
| Current consumption at max current              |                  | mA        | -190                           |          | 190         |                                                                                                                 |
| Operating temperature range                     | $T_a$            | °C        | -40                            |          | 85          |                                                                                                                 |
| Offset change with external magnetic field      |                  | ppm/mT    | -8                             | 2        | 8           | ppm refers to $I_{PN\ DC}$                                                                                      |
| Offset change with power supply voltage changes |                  |           |                                | 2.6      |             | $\mu A$ refers to secondary current                                                                             |

1 ppm nominal = 0.1  $\mu A$  secondary current.

## Linearity error

Linearity error is defined as the deviation from a straight line. The straight line is a linear regression trend line based on the least squares method of the measurement points from 0 to positive max current and another trendline is calculated from 0 to negative max current. The difference between each measured point and the linear trend line is the linearity error. The linearity error  $\epsilon_L$  can be expressed as (1), where  $I_{\text{reading}}$  is the measurement result and  $I_{\text{fitted}}$  is the regression value.

$$\epsilon_L = I_{\text{reading}} - I_{\text{fitted}} \quad (1)$$

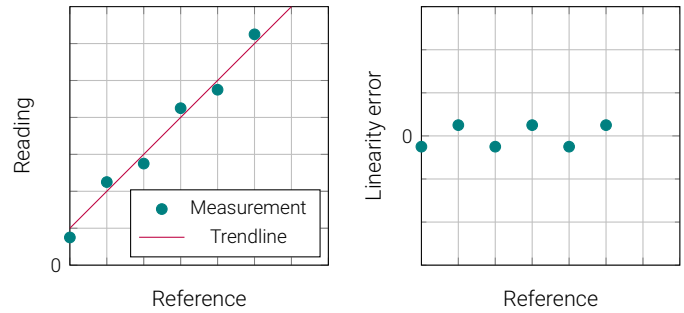


Figure 1: Linearity error definition

## Reading and full scale

Reading is the actual value measured at a given time. Full scale is the rated nominal value of the device. If a given current  $I_{\text{reading}}$  is measured, the total accuracy is calculated as (2). Example: A 500 A rated device has a specification of 0.005% + 0.0015% (reading + full scale) at < 10 Hz, plus an offset of 0.001 % (of full scale). The device is measuring (reading) 10 A dc, and the accuracy is calculated as (3).

$$\epsilon_{\text{tot}} = \epsilon_{\text{reading}} \cdot I_{\text{reading}} + (\epsilon_{\text{fullscale}} + \epsilon_{\text{offset}}) \cdot I_{\text{PNDC}} \quad (2)$$

$$\epsilon_{\text{tot}} = 0.005\% \cdot 10\text{A} + (0.0015\% + 0.001\%) \cdot 500\text{A} = 13\text{mA} \quad (3)$$

## Primary and secondary current/voltage

The secondary current  $I_S$  or voltage  $V_S$  is calculated by using the transfer ratio  $k$ , as in (4).

$$I_S = \frac{I_P}{k}, \quad V_S = \frac{V_P}{k} \quad (4)$$

## Converting from ppm of nominal to secondary current/voltage

The nominal primary current is the rated current for the device. If  $\epsilon_{\text{ppm}}$  is the error in ppm referred to nominal, use (5) to convert to ampere primary current. If the primary/secondary transfer ratio is  $k$ , use (6) to convert to ampere secondary current. If the device has voltage output, use (7)

$$\epsilon_{\text{Pampere}} = \epsilon_{\text{ppm}} \cdot I_{\text{PNDC}} \cdot 1 \times 10^{-6} \quad (5)$$

$$\epsilon_{\text{Sampere}} = \epsilon_{\text{ppm}} \cdot \frac{I_{\text{PNDC}}}{k} \cdot 1 \times 10^{-6} \quad (6)$$

$$\epsilon_{\text{Svolt}} = \epsilon_{\text{ppm}} \cdot \frac{V_{\text{PNDC}}}{k} \cdot 1 \times 10^{-6} \quad (7)$$

## Linear interpolation of accuracy specification

If the accuracy at a specific frequency is required, it is possible to use linear interpolation between known points. If the frequency  $f$  is  $f_1 < f < f_2$  and the accuracy at the frequency  $\epsilon(f)$  is  $\epsilon(f_1) < \epsilon(f) < \epsilon(f_2)$ , then the accuracy at  $f$  is found as (8).

$$\epsilon(f) = \frac{\epsilon(f_2) - \epsilon(f_1)}{f_2 - f_1} (f - f_1) + \epsilon(f_1) \quad (8)$$

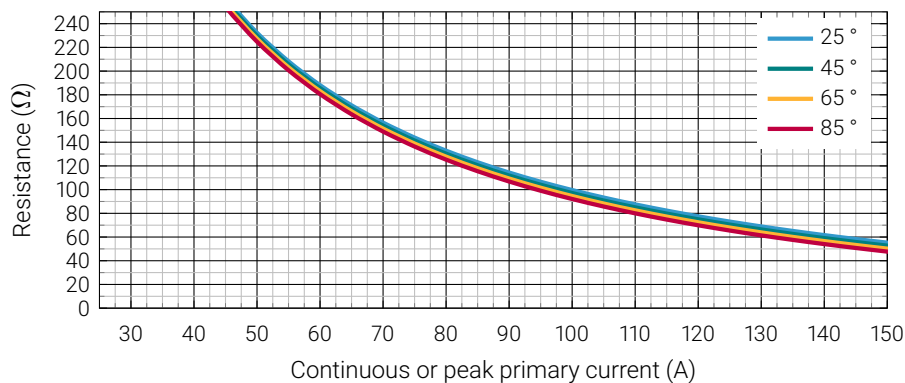


Figure 2: Maximum measurement resistor  $R_M$  vs. current and ambient temperature

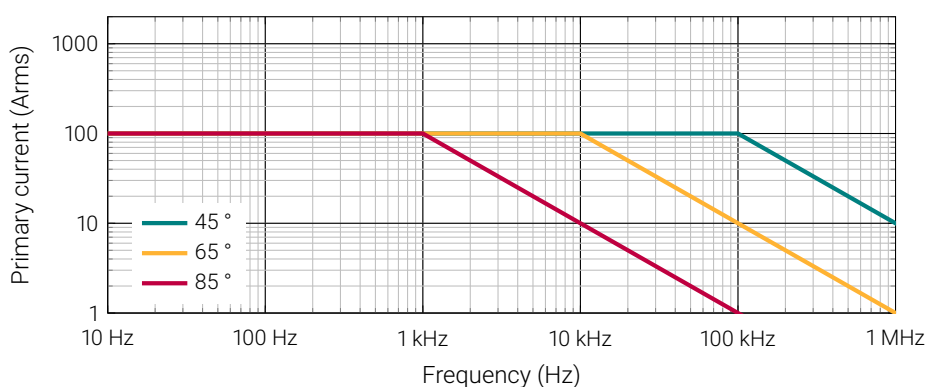


Figure 3: Maximum continuous primary current vs. frequency

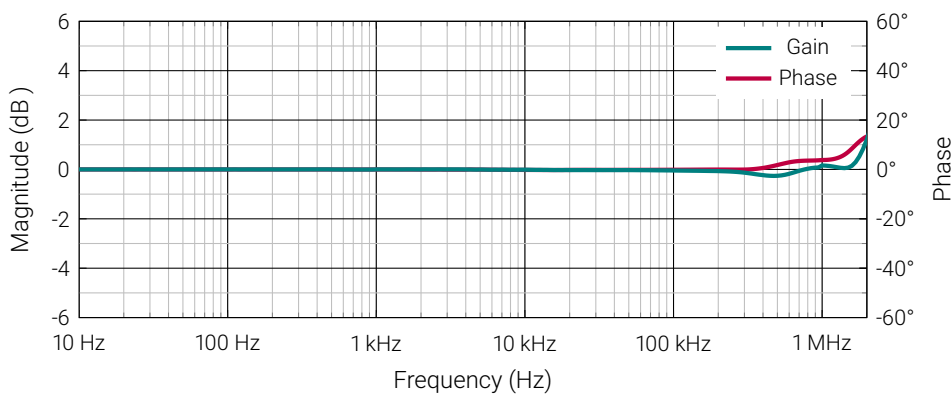


Figure 4: Frequency characteristics. For high frequency measurement, see <https://danisense.com/wp-content/uploads/Current-Measurements-at-High-Frequencies.pdf>

## Isolation specifications according to IEC 61010-1



When using *REINFORCED insulated* wire, all wiring must be insulated for the highest voltage used. When using *BASIC insulated* or *uninsulated* wire, follow the specified voltages in the table below:

| Parameter                                                 | Unit                 | Value |
|-----------------------------------------------------------|----------------------|-------|
| Clearance                                                 | mm                   | 8.5   |
| Creepage distance                                         | mm                   | 11.5  |
| Comparative tracking index (CTI)                          | V                    | > 600 |
| Continuous working voltage according to IEC 61010-1 with: |                      |       |
| <i>Uninsulated</i> wire:                                  | Non mains            | 1000  |
|                                                           | CAT II (dc and rms)  | 600   |
|                                                           | CAT III (dc and rms) | 300   |
| <i>BASIC insulated</i> wire:                              | Non mains            | 2000  |
|                                                           | CAT II (dc and rms)  | 1000  |
|                                                           | CAT III (dc and rms) | 1000  |
| Transient voltage according to IEC 61010-1 with:          |                      |       |
| <i>Uninsulated</i> wire:                                  | Non mains            | 4000  |
|                                                           | CAT II               | 6000  |
|                                                           | CAT III              | 6000  |
| <i>BASIC insulated</i> wire:                              | Non mains            | 3500  |
|                                                           | CAT II               | 6000  |
|                                                           | CAT III              | 8000  |



Do not connect the transducer to signals or use for measurements within Measurement Category IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation.

## Environmental and mechanical characteristics

| Parameter                   | Unit | Min | Typ  | Max  | Comment                 |
|-----------------------------|------|-----|------|------|-------------------------|
| Altitude                    | m    |     |      | 2000 | Designed for indoor use |
| Usage                       |      |     |      |      |                         |
| Pollution degree            |      |     |      | 2    |                         |
| Operating temperature range | °C   | -40 |      | 85   | Non-condensing          |
| Storage temperature range   | °C   | -40 |      | 85   |                         |
| Relative humidity           | %    | 20  |      | 80   |                         |
| Ingress protection rating   |      |     |      | IP20 |                         |
| Mass                        | kg   |     | 0.15 |      |                         |

Connections: DSUB-9

EMC: EN 61326-1:2013-2021

Safety: IEC 61010-2-030:2021/A11:2021 and IEC 61010-1:2010/A1:2019

Random vibration test: IEC 60068-2-64:2008

|                   |                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shock test:       | IEC 60068-2-27:2009                                                                                                                                                                                                                                                                       |
| External devices: | External devices connected to current transducers must comply with the standards IEC61010-1 and IEC62368-1 and be energy-limited circuitry                                                                                                                                                |
| Cleaning:         | The transducer should only be cleaned with a damp cloth. No detergent or chemicals should be used.                                                                                                                                                                                        |
| Temperature:      | When multiple primary turns are used or high primary currents are applied the temperature around the transducer will increase, please monitor to ensure that the maximum ratings are not exceeded. It is recommended to have minimum 1 mm <sup>2</sup> per ampere in the primary bus bar. |

## Intended use

The DT100ID is designed to measure current up to 150 A, and be powered by a Danisense System Interface Unit (DSSIU) or similar power supplies. Please see the product manual: <https://danisense.com/user-manual>

## Instruction for use



Please follow the polarity of the voltage supply to avoid damaging the device. See Fig. 6.

1. Do not power up the device before all cables are connected.
2. Place the primary conductor through the aperture of the transducer.
3. Connect a D-sub-9 cable between DSSIU and each sensor.
4. Connect a low impedance amperemeter, measuring resistor or power analyzer on the secondary output (4mm red and black connectors on the DSSIU).
5. When all connections are secured - connect mains power.
6. Apply primary current.



There is a risk of electrical shock if an uninsulated busbar with high voltages is touching the metal enclosure of the transducer. Please ensure, before powering up the system, that no uninsulated wire can touch the metal enclosure.



Do not disassemble the unit. If the green status LED is not operating with all cables connected and the system powered up, disconnect power and contact Danisense for further instruction. If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

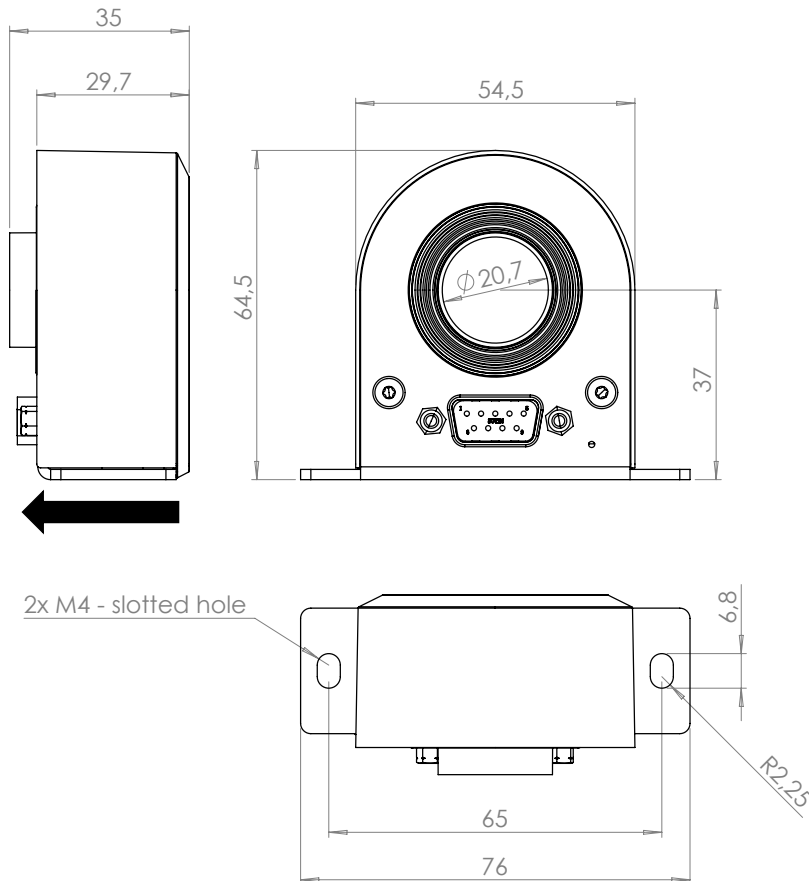


Figure 5: Dimensions of transducer. 0.3 mm Tolerance

## Mounting

Base plate mounting: 2 slotted holes  $\varnothing 6$  mm  
 Back plate mounting: 4 slotted holes  $\varnothing 6$  mm  
 Fastening torque: 5.5 Nm

## Pin out description

|   |                  |                                      |
|---|------------------|--------------------------------------|
| 1 | Out-             | Measurement output negative terminal |
| 2 | NC               | No connection                        |
| 3 | Status-          | Status signal negative terminal      |
| 4 | 0 V              | 0 V connection for supply voltage    |
| 5 | V <sub>S</sub> - | Negative supply voltage              |
| 6 | Out+             | Measurement output positive terminal |
| 7 | NC               | No connection                        |
| 8 | Status+          | Status signal positive terminal      |
| 9 | V <sub>S</sub> + | Positive supply voltage              |




Figure 6: DSUB-9 connection pinout




Figure 7: Status signal optocoupler




Figure 8: External measurement resistor connection, see [Fig. 2](#)

## Positive current direction

Is identified by an arrow on the label.

## Status signal and LED

When the sensor is operating in normal condition the status pins (Status+ and Status-) are shorted by an optocoupler and the green status LED is ON, see [Fig. 7](#). When a fault is detected, or the power is off, the status pins are opened and the green status LED is OFF. Status signal optocoupler ratings found below:

|                          |                                     |
|--------------------------|-------------------------------------|
| Forward direction:       | Status+ to Status- (Pin 8 to pin 3) |
| Maximum forward current: | 10 mA                               |
| Maximum forward voltage: | 60 V                                |
| Maximum reverse voltage: | 5 V                                 |